


Notes: Crimp stem OD changed from 2.35 mm to 2.75 mm. Length increased from 5 mm to 6.4 mm.
 overall length increased from 19.8 mm to 21.2 mm . 4/23/07 MH

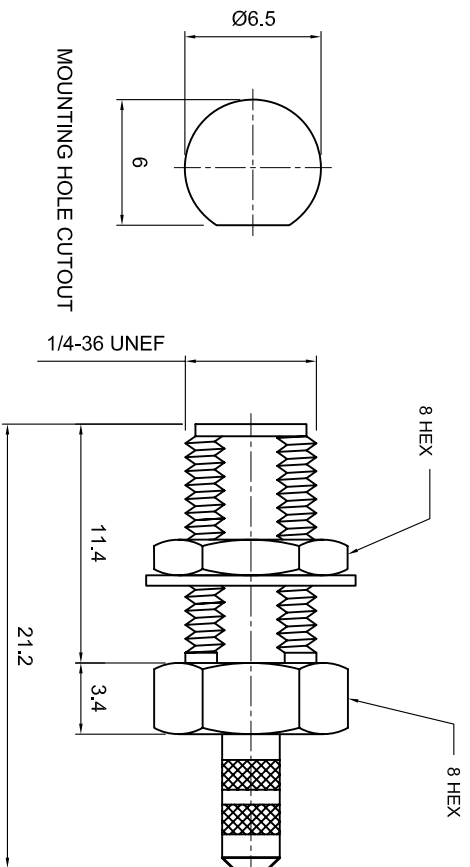


Revisions		Approved	Date
Description/Approved/Date	Checked	M.H.	10/13/00
	Checked	M.H.	10/12/00
	Drawn	K.R.E.	10/12/00

Tolerances
 1-20=+/-0.2
 20-30=+/-0.3
 30-40=+/-0.4
 40-50=+/-0.5
 50-100=+/-0.75
 100-300=+/-1.5
 Angles=+/-1

Dimensions are in Millimeters

NOTES (plating thickness in microinches):
 1. Per QQ-B-626
 2. Per QQ-S-764
 3. Per QQ-C-530
 4. Per QQ-B-750
 5. Per MIL-P-19488
 6. Per ZZ-R-765
 7. Per WW-1-799
 8. Gold pl. min. over nickel pl. 50 min. over copper strike
 9. Nickel pl. 100 min. over copper strike
 10. Per QQ-P-35
 11. Gold pl. 300 min. over nickel pl. 50 min. over copper strike

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Same as body



Lighthouse Technologies, Inc.
 5640 Keamy Mesa Road, Suite N
 San Diego, California 92111

Part Number:
LTI-SASF13RGT-316

Description SMA bulkhead crimp jack for RG-316. Gold plated		
brass body, teflon dielectric.		
Scale	Drawing No.	File Name
3:1	SMA/SASF13R-316	SASF13R-316