



**Tolerances**  
 1-20=+/-0.2  
 20-30=+/-0.3  
 30-40=+/-0.4  
 40-50=+/-0.5  
 50-100=+/-0.75  
 100-300=+/-1.5  
 Angles=+/-1  
**Dimensions are in Millimeters**

Revisions Description/Approved/Date	Approved M.H.	Date 12/09/99
	Checked M.H.	Date 12/09/99
	Drawn K.R.E.	Date 12/09/99
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		

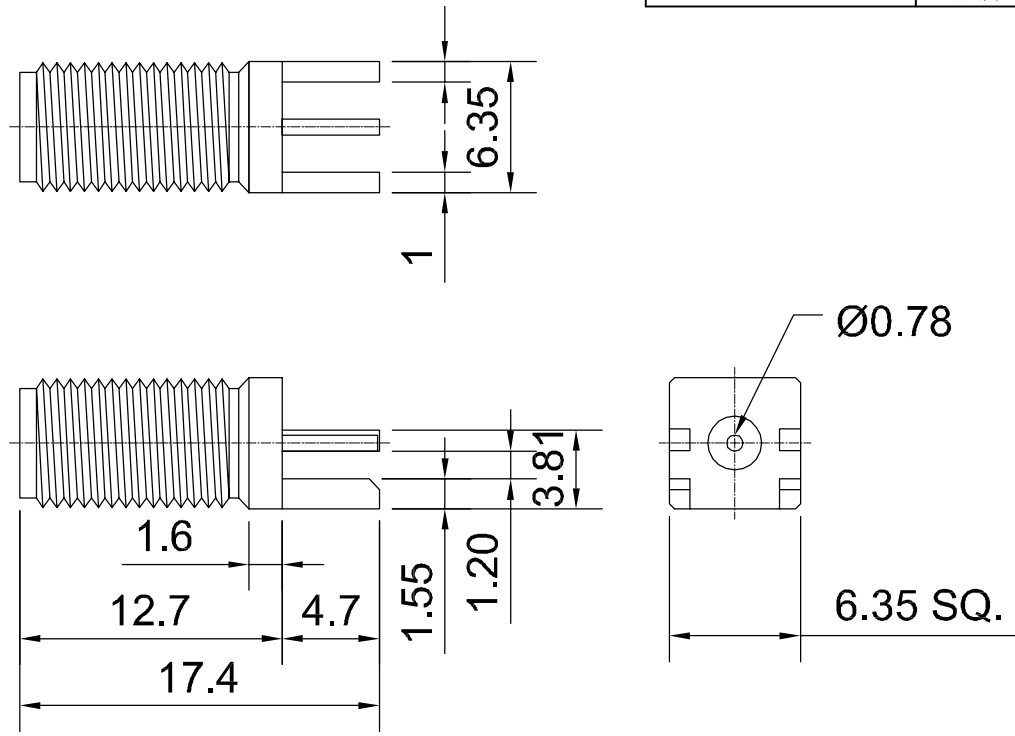

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: <b>LTI-SASF55MGT-4</b>
Connector Body	Brass, Note 1	Gold, Note 8	
Center Contact: Female	BeCu, Note 3	Gold, Note 11	
Insulation	Teflon, Note 5	None	
Ferrule	--	--	
Gasket	--	--	
Hex Nut	--	--	
Lock Washer		--	Description SMA end launch jack for 40 mil board, medium version. Gold plated brass body, Teflon dielectric. Scale 3:1 Drawing No. File Name SASF55M-4